PUBLIC PROCUREMENT REGULATORY AUTHORITY (PPRA)

CONTRACT AWARD PROFORMA-I
(As Per Rule-47 of PP Rules, 2004)

To Be Filled and Uploaded on PPRA Website in Respect of All Public Contracts of Works, Services and Goods.

➢ NAME OF THE ORGANIZATION / DEPARTMENT.	**Karachi Port Trust / Civil Works Division**
➢ FEDERAL / PROVINCIAL GOVT.	**Federal Gov . (KPT Board of Trustees)**
➢ TITLE OF CONTRACT	**REHABILITATION OF KPT BOYS & GIRLS SECONDARY SCHOOL KEAMARI**
➢ TENDER NUMBER	**TS528504E**
➢ BRIEF DESCRIPTION OF CONTRACT:	Manager Education vide his letter has intimate about deteriorated condition of subject school. Accordingly, a site visit has been carried out with Manager Education, Dy. Chief Engineer & XEN (S) alongwith concerned staff. During visit it has been observed that the subjected school require **extensive repair / maintenance work** to this KPT asset in order to keep the same in well maintained condition and as well as to enhance its useful life.
➢ TENDER VALUE	**Rs. 13,205,245.00**
➢ ENGINEER'S ESTIMATE (for civil Works only)	**Rs.16,200,115.00**
➢ ESTIMATED COMPLETION PERIOD	**06 Months**
➢ WHETHER THE PROCUREMENT WAS INCLUDED IN ANNUAL PROCUREMENT PLAN?	**NO**

➢	Advertisement: i) PPRA Website (Federal Agencies) (If yes, give date and PPRA's tender number) • **Dated: 21-12-2023** • **PPRA No. TS528504E**	Yes ✓	No
	ii) News Papers (If yes, give names of newspapers and dates) **Newspapers**: 1. **Daily Down Dated 17-12-2023** 2. **Daily Jang Dated 17-12-2023**	Yes ✓	No
➢	TENDER OPENED ON (DATE & TIME)	08-01-2024 at 1130 Hrs.	
➢	NATURE OF PURCHASE	Local ✓	Int.
➢	EXTENSION IN DUE DATE (If any)	Yes	No ✓

Executive Engineer (South)
KARACHI PORT TRUST

➢	NUMBER OF TENDER DOCUMENTS SOLD	Not Known Uploaded on PPRA / KPT Websites	
➢	WHETHER QUALIFICATION CRITERIA WAS INCLUDED IN BIDDING/TENDER DOCUMENTS (If yes enclose a copy).	Yes	No
		✓	
➢	WHETHER BID EVALUATION CRITERIAWAS INCLUDED IN BIDDING / TENDER DOCUMENTS. (If yes enclose a copy).	Yes	No
		✓	
➢	WHICH METHOD OF PROCUREMENT WAS USED: - (Tick one)		
	a) SINGLE STAGE - ONE ENVELOPE PROCEDURE		✓
	b) SINGLE STAGE - TWO ENVELOPE PROCEDURE		-
	c) TWO STAGE BIDDING PROCEDURE		-
	d) TWO STAGE - TWO ENVELOPE BIDDING PROCEDURE		-
➢	PLEASE SPECIFY IF ANY OTHER METHOD OF PROCUREMENT WAS ADOPTED WITH BRIEF REASONS (i.e. EMERGENCY, DIRECT CONTRACTING,NEGOTIATED TENDERING ETC.)		N/A
➢	WHO IS THE APPROVING AUTHORITY	**KPT Board's**	
➢	WHETHER APPROVAL OF COMPETENT AUTHORITY WAS OBTAINED FOR USING A METHOD OTHER THAN OPEN COMPETITIVE BIDDING.	Yes	No
			✓
➢	NUMBER OF BIDS RECEIVED	Five Bids Received	
➢	WHETHER THE SUCCESSFUL BIDDER WAS LOWEST BIDDER	Yes	No
		✓	
		Five Bids Received	
➢	WHETHER INTEGRITY PACT WAS SIGNED	Yes	No
		✓	

Executive Engineer (South)
KARACHI PORT TRUST

PUBLIC PROCUREMENT REGULATORY AUTHORITY (PPRA)
(As Per Rule-47 of PP Rules, 2004)


CONTRACT AWARD PROFORMA –II

To Be Filled And Uploaded on PPRA Website in Respect of All Public Contracts of Works, Services & Goods

➢	NUMBER OF BIDDERS PRESENT AT THE TIME OF OPENING OF BIDS	**All Bidders were Present**
➢	NAME AND ADDRESS OF THE SUCCESSFUL BIDDER	**M/s. Al- Saudi Engineers Bloc -A 10th Floor Flat No.C-1010 Ne qra University Qayomabad Ka i.**
➢	RANKING OF SUCCESSFUL BIDDER IN EVALUATION REPORT (i.e. 1st, 2nd ,3rd EVALUATED BID)	**1st Evaluation Bid**
➢	NEED ANALYSIS only the procurement was necessary?)	**KPT Authorities is committed to Provide repair / maintenance of existing infrastructure**
➢	IN CASE EXTENSION WAS MADE IN RESPONSE TIME, WHAT WERE THE REASONS (Briefly describe)	-
➢	WHETHER NAMES OF THE BIDDERS AND THEIR PRICES WERE READ OUT AT THE TIME OF OPENING OF BIDS	**Nil**
➢	DATE OF CONTRACT SIGNING (Attach a copy of agreement)	**14 -2025**
➢	CONTRACT AWARD PRICE	**Rs. 13,205,745.00**
➢	WHETHER COPY OF EVALUATION REPORT GIVEN TO ALL BIDDERS (Attach copy of the bid evaluation report)	**Bid Evaluation Report under PPRA Rule-35 attached EV No. EV60015**
➢	ANY COMPLAINTS RECEIVED (If yes result thereof)	**NO**
➢	ANY DEVIATION FROM SPECIFICATIONS GIVEN IN THE TENDER NOTICE/ DOCUMENTS (If yes give details)	**NO**
➢	DEVIATION FROM QUALIFICATION CRITERIA (If yes give details)	**NO**
➢	SPECIAL CONDITIONS, IF Any (Give Brief Description)	-

Executive Engineer (South)
KARACHI PORT TRUST

A141733

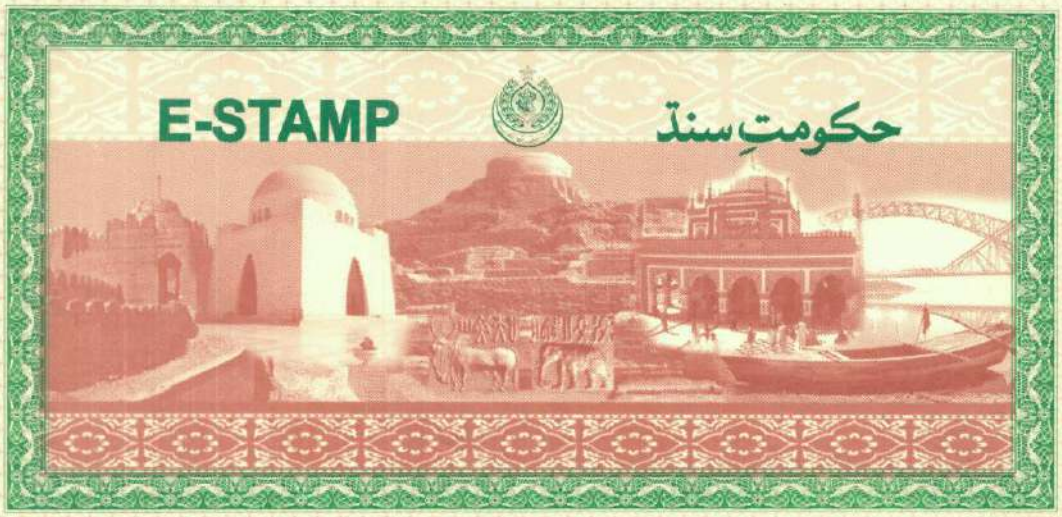

NBP-0007-2405300004723419 **GoS-KHI-2C1A9413F720FA8C**

Non-Judicial **Rs 46,221/-**

Description	: Contract - 15(a)
Principal	: M/s Al-Saudi Engineers [71089255]
Contractor	: M/s Al-Saudi Engineers [71089255]
Applicant	: Sheraz Ali [42201-6341296-9]
Stamp Duty Paid by	: M/s Al-Saudi Engineers [71089255]
Issue Date	: 30-May-2024, 05:01:21 PM
Paid Through Challan	: 2024D50C2C239AFD
Amount in Words	: Forty Six Thousand Two Hundred and Twenty One Rupees Only

AL-SAUDI ENGINEERS

Please Write Below This Line

FORM OF CONTRACT AGREEMENT

THIS **CONTRACT AGREEMENT** (hereinafter called the **"agreement"**) made on the _____ day of _____ 2024 between **Karachi Port Trust** (hereinafter called the "employer") of the one part and **M/s. Al-Saudi Engineers, of Defence View Society Diamond Residency Block –A Office # C1010 10th Floor Near Iqra University Qayomabad Karachi,** (hereinafter called the "contractor")of the other part. WHEREAS the Employer is desirous that certain Work, viz: - **REHABILITATION OF KPT BOYS & GIRLS SECONDARY SCHOOL KEAMARI.** "at the quoted rates and the margined down price of **Rs.13,205,745.00** (Rupees Thirteen Million Two Hundred Five Thousand Seven Hundred Forty Five Only) sanctioned "*Vide B.R No. 725 (Item-VI) Dated: 25-03-2024,***s**hould be executed by the Contractor and has accepted a bid by the Contractor for the execution and completion of such Works and the remedying of any defect therein, "**Further *the Contractor has deposited to the Board a sum of* Rs.660,300.00 (Rupees: Six Hundred Sixty Thousand Three Hundred Only) *as Performance Security as per Clause 4.4 of Contract Data vide KPT Challan No. 3005240049 Dated:- 31-May- 2024.***

NOW this agreement witness as follows:

1. In this Agreement words and expressions shall have the same meanings as are respectively assigned to them in the Conditions of Contract hereinafter referred to.
2. The following documents except those parts relating to Instructions to Bidders shall be deemed to form and read and constructed as part of this Agreement, viz: -

   a. The Contract Agreement:
   b. The Letter of Acceptance;
   c. The completed Form of Bidalongwith Schedules to Bid:
   d. Integrity Pact
   e. The General Conditions
   f. Terms of Reference
   g. Special Stipulation
   h. The Drawings:
   i. Relevant Correspondence (any other)

AL-SAUDI ENGINEERS

3. In consideration of the payments to be made by the Employer to the Contractor as Hereinafter mentioned, the Contractor hereby covenants with the Employer to Execute and complete the works remedy defects therein in conformity and in all respects with the provision of the contract.

4. That Employer hereby covenants to pay the contractor in consideration of the Execution and completion of the work as per provision of the Contract, the Contract price or such other sum as may become payable under the provision of the contract at times in the manner prescribed by the Contract.

IN WITNESS WHERE OF the parties hereto have caused this agreement to executed on the day, month and year first before written in accordance with their respective laws.

SIGNED, AND DELIVERED BY THE

Chairman and two Trustees on behalf of the Board of Trustees of the Port ofKarachi.

Signed b
In the Presence of

Chairman, Karachi Port Trust
CNIC #

Zahid Hussain
General Manager (CW)
CNIC #42201-6078496-5

General Manager
(Civil Works)
Karachi Port Trust
KARACHI

Singed by

Trustee

In the presence of

Trustee

Secretary, KPT

And

Signed and Delivered by the with named Contractor **M/s. Al-Saudi Engineers,** through their **Proprietor Mr. Sheraz Ali.**

Signed by

In the presence of

Contractor

Mr. Sheraz Ali (Proprietor)
CNIC. No. 42201-6341296-9

Witness
1) Mr. M. Naveed.
CNIC. #
Sig

INTEGRITY PACT

E-STAMP
CONTINUATION SHEET
Government of Sindh

DECLARATION OF FEES, COMMISSION AND BROKERAGE ETC. PAYABLE BY THE SUPPLIERS OF GOODS, SERVICES & WORKS IN CONTRACTS WORTH RS. 10.00 MILLION OR MORE.

Contract No. No. E/CS-2(980)/528 Dated: 02-Feb-2024
Contract Value: Rs. 16,439,194.80

CONTRACT TITLE: REHABILITATION OF KPT BOYS & GIRLS SECONDARY SCHOOL KEAMARI.

M/s. Al-Saudi Engineers, hereby declares that it has not obtained or induced the Procurement of any contract, right, interest, privilege or other obligation or benefit from Government of Pakistan (GoP) or any administrative subdivision or agency thereof or any other entity owned or controlled by GoP through any corrupt business practice.

Without limiting the generality of the foregoing **M/s. Al-Saudi Engineers**, represents and warrants that it has fully declared the brokerage, commission, fees etc. paid or payable to anyone and not given or agreed to give and shall not give or agree to give to anyone within or outside Pakistan either directly or indirectly through any natural or juridical person, including its affiliate, agent, associate, broker, consultant, director, promoter, shareholder, sponsor or subsidiary, any commission, gratification, bribe, finder's fee or kickback, whether described as consultation fee or otherwise, with the object of obtaining or inducing the procurement of a contract, right, interest, privilege or other obligation or benefit in whatsoever form from GoP, except that which has been expressly declared pursuant hereto.

M/s. Al-Saudi Engineers, certifies that it has made and will make full disclosure of all agreements and arrangements with all persons in respect of or related to the transaction with GoP and has not taken any action or will not take any action to circumvent the above declaration, representation or warranty.

M/s. Al-Saudi Engineers, accepts full responsibility and strict liability for making any false declaration, not making full disclosure, misrepresenting facts or taking any action likely to defeat the purpose of this declaration, representation and warranty. It agrees that any contract, right, interest, privilege or other obligation or benefit obtained or procured as aforesaid shall, without prejudice to any other rights and remedies available to GoP under any law, contract or other instrument, be voidable at the option of GoP.

Notwithstanding any rights and remedies exercised by GoP in this regard **M/s. Al-Saudi Engineers**, agrees to indemnify GoP for any loss or damage incurred by it on account of its corrupt business practices and further pay compensation to GoP in an amount equivalent to ten time the sum of any commission, gratification, bribe, finder's fee or kickback given by **M/s. Al-Saudi Engineers**, as aforesaid for the purpose of obtaining or inducing the procurement of any contract, right, interest, privilege or other obligation or benefit in whatsoever form from GoP.

KARACHI PORT TRUST
(SECRETARIAT)

No. KPT/S-BS/405
Dated 09 APR 2024

RAL MANAGER (F)
RAL MANAGER (CW)
F ENGINEER

1157

SUB:- EXTRACT OF MINUTES OF BOARD MEETING OF 25.03.2024.
Rehabilitation of KPT Boys & Girls Secondary School Keamari

A copy of B.R.No.725 (Item-VI) dated 25.03.2024, on the above subject forwarded herewith for necessary action.

l:-
1. B.R.No.725 (Item-VI) dated 25.03.2024
2. (File No. E/CS-2(980)/3008230001) to General Manager (CW)

SECRETARY

DCE(I) put up urgent 15/4/24

XEN(S) P.I. Expedite

16/4/24

15/4

IR No.	476
DATE	15/4/24
DCE-I	
DCE-II	
DCE-III	
Other	

B.R.No.725 (Item-VI) dated 25.03.2024

725. Resolution:-The Board considered Agenda Item No.2 i.e 33rd Report of the Board's Tender Committee Meeting dated 18.03.2024.

VI. Rehabilitation of KPT Boys & Girls Secondary School Keamari

The Board considered the matter regarding Rehabilitation of KPT Boys & Girls Secondary School Keamari, in the light of Executive Engineer (S)'s Note dated 26-02-2024 duly endorsed by Dy. Chief Engineer-II, Chief Engineer / General Manager (CW), / General Manager (A) & General Manager (F). The Board after examining the matter, sanctioned acceptance of the Most Advantageous Bid under PPRA rule 36(a) amounting to Rs.13,205,745/- (Rupees Thirteen million Two hundred Five thousand Seven hundred Forty five only), only) received from M/s. Al-Saudi Engineers for the work viz "Rehabilitation of KPT Boys & Girls Secondary School Keamari.

TRUE COPY,

Secretary

KARACHI PORT TRUST

AL-SAUDI ENGINEERS

Evaluation Results

Organization Name: *Karachi Port Trust*

Evaluation No	Evaluation Result Title	Download	Uploaded Date
EV60012	**Karachi Port Trust** Final Evaluation Maintenance and Repair to CBA Office..... E/CS-2(986)/ TS527242E		22/4/2024
EV60011	**Karachi Port Trust** Final Evaluation Maintenance and Repair to KPT Flat..... E/CS-2(988)/ TS528721E		22/4/2024
EV60015	**Karachi Port Trust** Final Evaluation Rehabilitation of School.. E/CS-2(980) TS528504E		22/4/2024
EV59962	**Karachi Port Trust** Final Evaluation Maintenance and Repair to KPT Flat..... E/CS-2(991)/ TS530592E		19/4/2024
EV59947	**Karachi Port Trust** Final Evaluation REPAIR & REFIXING OF CONCERTINA No: E/N-2(133)/ TS531439E		17/4/2024
EV59867	**Karachi Port Trust** Final Evaluation Providing and Fixing of Missing Rubber..... E/CS-2(941)/ TS523412E		17/4/2024
EV59819	**Karachi Port Trust** Final Evaluation SHIFTING & STACKING OF SERVICEABLE E/CW-26(540)/2024 TS531839E		15/4/2024
EV59781	**Karachi Port Trust** Final Evaluation Repair/Renovation of Office..... E/N-2(67)/ TS531439E		9/4/2024
EV59664	**Karachi Port Trust** Final Evaluation Maintenance/Repair.. E/N-2(130) TS529548E		4/4/2024
EV59524	**Karachi Port Trust** Final Evaluation Maintenance and Repair to KPT Flat..... E/CW-2(992)/ TS529637E **Karachi Port Trust**		1/4/2024

ENGINEERS ★ AL-SA

KARACHI PORT TRUST

GATEWAY TO PAKISTAN

Tender List

losing Date	Opening Date	Description	
8, Jan 2024	8 , Jan 2024	Rehabilitation Boys and Girls Secondary School Keamari TENDER DOCUMENTS. Type: **Civil Works**	36 Downloaded

Public Tenders

View By: All Organizations Sectors

Please Click on image to Download/View.
Only 10 days old tenders from the closing date will be shown.

Organization Name: ***Karachi Port Trust***

Sector Name : Clothing/Uniform

Search

Tender No	Tender Title	Download	Advertised Date	Closing Date
TS528504E	**Karachi Port Trust, Karachi** Reconstruction Boys and Girls Secondary School Keamari Reconstruction Boys and Girls Secondary School Keamari N/A		21/12/2023	8/1/2024 11:00:00 AM

AL-SAUDI ENGINEERS

6

DAWN

Date: 17/12/2023

KARACHI PORT TRUST

Executive Office
Engineering Department

TENDER NOTICE- Engineering Department

76 Years

Tenders are invited by the Chief Engineer KPT, under PPRA Rule 36 (b) from E-Pakistan registered with Government, Semi-Government Departments/Organizations etc. with any capability/class for the following work. All interested firms who possess experience in the relevant field may obtain the tender documents available at the above mentioned address of KPT, PPRA & AGPA Websites.

NAME & SCOPE OF WORK	DATE & TIME OF RECEIPT AND OPENING OF TENDER
REHABILITATION OF APT BOYS & GIRLS SECONDARY SCHOOL, KEAMARI	
The work entails comprehensive: • RCC Roof Slab Works. • Repair of Boundary Wall & Fencing Works. • Repairing of Damaged Ceiling, Columns & Chajja. • Water Works & General Plumbing Works. • Paint Works. • CP/C Fans Works. • Existing Doors & Furniture Repairing Works. • Painting & Anti Termite Works. Bid Security amount Rs.[illegible] (Call Deposit/Pay Order) in favour of Chief Accounts Officer KPT.	Receipt at [illegible] Hrs. & Opening at [illegible] Hrs. Tender Fee Rs. 1000/- (Non-refundable)

1. The intending Bidders must be registered with the E-Pakistan Engineering Council in Category C-6 and above with specified trade. Their credentials for the above mentioned work.

2. The intending Bidders may visit KPT / PPRA & AGPA Websites and may download the Tender Documents. The Tender Cost/Tender Fees amounting to Rs.[illegible]/- (Non-refundable/Call Deposit) and the EMD amounting of Rs.work which is Rs.[illegible]/- (Call Deposit/Pay Order) will be submitted in the form of pay order/call deposit/pay Slip in the favour of Chief Accounts Officer KPT.

The Tender documents must be submitted along with:

a) Copy of Bank Statement for last three years.
b) Copy of Sales Tax registration (wherever applicable).
c) Updated Company Profile for the purpose of bidding for the firm in KPT.
d) Copy of valid PEC Registration Certificate.
e) Affidavit on Stamp Paper as per Schedule to be issued by any Magistrate.
f) In case of companies and firms, last three years Audited Financial Statements are to be submitted showing minimum average turnover of Rs. 1.0 Million.
g) In case of individuals/sole proprietors, last three years Income Tax returns are to be submitted showing minimum turnover of Rs. 0.5 Million on average for last three years.
h) The Bidder must fulfill the eligibility criteria mentioned in Annexure-I of Bidding Documents.
i) All Tenders must be duly Signed & Stamped by the Bidder.

3. Only the PPRA & PEC Registered Bidders are eligible for Bidding. Bidder having any Adverse Inclusion of [illegible] Govt. Entity is ineligible to participate in Tender Process.

4. The bid meeting will take place in the Committee Room of the Civil Works / Engineering Department, at 2nd Floor, KPT Head Office Building, Karachi on given date & time.

5. The KPT may reject all Bids or proposals at any time prior to the acceptance of a Bid or Proposal. The KPT shall upon request communicate to any supplier or contractor whose proposal a Bid or Proposal, the ground for the rejection of all Bids or Proposals, but is not required to justify those grounds.

6. The Bidder must read the instructions mentioned in Para 1-5 carefully especially the Para 1 failing which Bid will be liable to be rejected.

CHIEF ENGINEER
KPT Head Office Building,
Khayaban Shahbaz Road, Karachi-74000.
PABX No. [illegible]

M. Mehrasali

ENGINEERS * AL-SAUD

7

Daily Jang

Date: 17-12-2023

76 Years

کراچی پورٹ ٹرسٹ

پاکستان کا گیٹ وے

ایک عظیم ورثہ۔ایک تابناں وروشن مستقبل

ٹینڈر نوٹس۔انجینئرنگ ڈپارٹمنٹ

مندرجہ ذیل کام کے لئے سرکاری، نیم سرکاری محکمہ/آرگنائزیشن یا کسی معروف کلائنٹ سے رجسٹرڈ پیشکش دہندگان سے PPRA رول 36(a) کے تحت چیف انجینئر KPT کی جانب سے ٹینڈر طلب کئے جاتے ہیں تمام دلچسپی کی حامل فرمز جو متعلقہ شعبہ میں تجربہ کی حامل ہیں وہ PPRA، KPT اور MOMA ویب سائٹس پر ڈاؤن لوڈ ورژن پر دستیاب ٹینڈر دستاویزات حاصل کر سکتی ہیں۔

کام کا نام اور نوعیت	ٹینڈر کی وصولی اور جمع کرنے کی تاریخ اور وقت
KPT ہوائر اینڈ گرلز سیکنڈری اسکول کیماڑی کی بحالی کام بنیادی طور پر مندرجہ ذیل پر مشتمل ہوگا: • RCC سن شیڈ ورکس • باؤنڈری وال کی مرمت اور فینسنگ کے کام • ناکارہ سیلنگ کا صفایا اور چھجہ کی مرمت۔ • پلاسٹر کے کام اور جنرل اسٹیل ورکس • روڈ ٹیپ ورکس • UPVC پائپ ورکس • لیبارٹری بلاک اور فرنیچر مرمت کے کام • پینٹنگ اینڈ اسٹی نرمایٹ ورکس بڈ سیکیورٹی بہ رقم 500,000/- روپے فلسد (قابل واپسی) بشکل پے آرڈر بنام چیف اکاؤنٹس آفیسر KPT	02-01-2024 بروقت صبح 11:00 بجے ٹینڈر کی وصولی اور اسی یوم کو بوقت صبح 11:30 بجے کھانا ٹینڈر فیس 5000/- روپے (ناقابل واپسی)

(1) دلچسپی رکھنے والے پیشکش دہندگان ان ٹینڈر کھلنے کی تاریخ کو کارآمد ودرجہ C-6 اور بالا نیز اسپیشلائزڈ کوڈ CE-10 میں پاکستان انجینئرنگ کونسل سے رجسٹرڈ ہوں۔ (2) خواہشمند پیشکش دہندگان KPT، PPRA اور MOMA ویب سائٹس وغیرہ اور ٹینڈر دستاویزات ڈاؤن لوڈ کر سکتے ہیں۔ مجوزہ ٹینڈر فیس بہ رقمی 5000/- روپے (ناقابل واپسی) اور بوجم کی بڈ سیکیورٹی جو 500,000/- روپے کلمنڈ (قابل واپسی) ہے بشکل پے آرڈر بنام چیف اکاؤنٹس آفیسر KPT ٹینڈر جمع کرانے کے وقت اپنی پیشکش کے ساتھ علیحدہ لفافے میں جمع کرانی ہوگی۔

از (b to n) مندرج لازمی شرائط پوری کرتی ہیں

(اے) تازہ ترین کارآمد NTN اور SRB سرٹیفکیٹس کی کاپی۔ (بی) آن لائن ٹیکس ویری فیکیشن کاپی (ATL کی تازہ کاپی)۔ (سی) اپ ڈیٹڈ کمپنی پروفائل ان کیلئے جو KPT میں پہلی بار شرکت کر رہے ہیں۔ (ڈی) کارآمد PEC رجسٹریشن سرٹیفکیٹ کی نقل۔ (ای) حلف نامہ کہ فرم/کمپنی/کنسورشیم میں نامزد نہیں ہے نہ ہی کسی آرگنائزیشن کی جانب سے بلیک لسٹڈ ہے۔ (ایف) کمپنیز اور فرمز کی صورت میں گزشتہ

(16)

Daily Jang

Date: 21-Dec-2023

ضروری تصحیح

اخبار ہذا میں مورخہ 17-12-2023 کو صفحہ 19 کالم 1تا2 میں KPT کا اشتہار حال (PID(K)#1781/23) میں ٹینڈر وصولی اور کھلنے کی درست تاریخ 08-01-2024 پڑھی جائے۔

AL-SAUDI ENGINEERS

21 September 2023

KARACHI PORT TRUST
ENGINEERING DEPARTMENT

DOCUMENTS TO BE RETURNED

NAME OF WORK: REHABILITATION OF KPT BOYS & GIRLS SECONDARY SCHOOL KEAMARI.

S.No	Description of Work	Unit	Rate	Quantity	Amount(Rs.)

Notes:-

a) After the completion of the work the contractor is required to clear away and remove from the site all construction plants, surplus material, rubbish, debris and temporary works of every kind etc. to the entire satisfaction of the Engineer. It may be noted that Contractors' account will not be finalized till such time a certificate to this effect is obtained from Executive Engineer and submitted to the Chief Engineer for his information.

b) The Contractor must ensure that the dismantled materials should be disposed is accordance with safety standards fixed by the civic agencies and specified environmental protection rules.

c) Debris dismantled materials, rubbish etc. should be disposed in such a way that it should not cause any pollution and shall not be source of harm to public.

d) The tenderer must fill all the pages of Performa "A" & A-1" of tender documents, and ensure enclosing of the pay order for Bid **Security Amount Rs. 500,000.00 Fixed**

e) The tenderers are advised to avoid cutting / over writing in B.O.Q. In case any cutting / over writing it should be properly re-write, sign and stamp otherwise, the tenders may not be considered.

f) The (Contractor Tech Representative) is band to visit the plan monthly & give satisfactory report after checking the plan or he is bond to visit on the call of the Engineer Incharge as & under required.

g) ***"Only the FBR & SRB Registered Contractors are eligible for bidding, Contractor has to quote their rates inclusive of all Govt. Taxes".***

AL-SAUDI ENGINEERS

CHIEF ENGINEER
K.P.T

Case -3d

REHABILITATION OF KPT BOYS & GIRLS SECONDARY SCHOOL KERIKARI

Plan #

Dated :

S.No.	Ref.	Item description	Unit	Rate	Rate in Words	Quantity	Amou
1		---------- R.C.C. SUN SHED WORK/ CANTILEVER ---------- DISMANTLING AND CHISELING CEMENT CONCRETE WORK (C.C OR R.C.C) 3" THICK R.C.C. SLAB INCLUDING DISPOSAL OF MATERIAL AND SERVICEABLE MATERIAL SUBMITTED TO AKEN (W) OFFICE AS DIRECTED OUT SIDE KPT LIMIT ALL AS DIRECTED.	PER SQM	680/-	Six hundred eight 0	100.00	68.0
2		PROVIDING AND LAYING REINFORCED CEMENT CONCRETE USING SCREENED GRADED BAJRI 20 MM (3/4") AND DOWN GAUGE HAVING A MINIMUM WORKING CUBE CRUSHING STRENGTH OF 3000 LBS. PER SQ. INCH AFTER 28 DAYS WITH A MIX NOT LEANER THAN 1:2:4 IN, BUT EXCLUDING THE COST OF REINFORCEMENT IN BASEMENT AND GROUND FLOOR , FIRS FLOOR COLUMN, BEAMS, LINTELS, ROOF SLAB, CHAJJA, WALLS STAIRCASE, ETC., OF REQUIRED SHAPE AND DESIGN INCLUDING FORM WORK AT ANY HEIGHT ANY FLOOR AND ITS REMOVAL, COMPACTING AND CURING ETC. COMPLETE.	PER CUM	16,000/-	Sixteen thousand	18.00	288.0
3		PROVIDING AND LAYING HARD GRADE RIBBED TOR STEEL (MINIMUM STRENGTH 60,000 PSI) REINFORCEMENT BARS WITH AND INCLUDING THE COST OF STRAIGHTENING, CUTTING, BENDING, BINDING, WASTAGE AND SUCH OVERLAPS AS ARE NOT SHOWN ON THE DRAWING PLACING IN POSITION IN CEMENT CONCRETE 1:2:4 PRECAST OR M.S. CHAIRS, TYING WITH BINDING WIRE, COST OF CHAIRS AND WIRES ETC. IN ALL KIND OF R.C.C WORK IN FOUNDATION, BASEMENT, PLINTH AND GROUND FLOOR.	PER KG	300/-	Three hundred	900.00	270.0
4		REPAIRING OF DAMAGE CEILING ,COLOUMN , CHAJJA, BY PREPARING THE SURFANCE AND APPLYING ½" CEMENT SAND LASTER WITH 1:3 RATIO OF SEMENT SAND FINISHED SMOOTH INCLUDING CHIPPING ,MAKING PROPER THICKNESS AND SURFANCE CURING, SCAFFOLDING, CORNICES, EDGES ALL AS SPECIFIED AND DIRECTED.	PER SQM	1400/-	Fourteen hundred	120.00	168,000
5		PREPARE SURFACE AND APPLYING ½" THICK CEMENT SAND PLASTER AT ANY HEIGHT OF RATIO 1:4, FINISHED SMOOTH INCLUDING CURING, SCAFFOLDING, CORNICES, EDGES ALL AS SPECIFIED AND DIRECTED	PER SQM	800/-	Eight hundred	200.00	160,0
6		----------BOUNDRY WALL FANCING WORK---------- PROVIDING AND LAYING 1:3:6 CEMENT CONCRETE SOLID BLOCK MASONRY MORE THAN 150 MM (6") THICK WALLS AND PILLARS USING GRADED SCREENED BAJRI 20 MM (3/4") AND DOWN GAUGE SET IN 1:4 CEMENT MORTAR IN FOUNDATION, BASEMENT AND PLINTH INCLUDING SCAFFOLDING RAKING OUT JOINTS AND CURING ETC., COMPLETE, (FOUNDATION AND BASEMENT MASONRY UPTO 1.50 M. (5 FT) DEPTH AND PLINTH UPTO 1.25 M. (4 FT) HEIGHT FROM THE GROUND LEVEL).	PER CUM	10,000/-	Ten thousand	14.00	140,00

CHIEF ENGINEER
K.P.T

Case -10

REHABILITATION OF KPT BOYS & GIRLS SECONDARY SCHOOL KERWARE

Plan #

Dated :

S.No.	Ref.	Item description	Unit	Rate	Rate in Words	Quantity	Amou
1		---------- R.C.C SUN SHED WORK/ CANTILEVER ---------- DISMANTLING AND CHISELING CEMENT CONCRETE WORK (C.C OR R.C.C) 3" THICK R.C.C SLAB INCLUDING DISPOSAL OF MATERIAL AND SERVICEABLE MATERIAL SUBMITTED TO AKEN (W) OFFICE AS DIRECTED OUT SIDE KPT LIMIT ALL AS DIRECTED.	PER SQM	680/-	Six hundred eight 0	100.00	68,0
2		PROVIDING AND LAYING REINFORCED CEMENT CONCRETE USING SCREENED GRADED BAJRI 20 MM (3/4") AND DOWN GAUGE HAVING A MINIMUM WORKING CUBE CRUSHING STRENGTH OF 3000 LBS. PER SQ. INCH AFTER 28 DAYS WITH A MIX NOT LEANER THAN 1:2:4 IN, BUT EXCLUDING THE COST OF REINFORCEMENT IN BASEMENT AND GROUND FLOOR , FIRS FLOOR COLUMN, BEAMS, LINTELS, ROOF SLAB, CHAJJA, WALLS STAIRCASE, ETC., OF REQUIRED SHAPE AND DESIGN INCLUDING FORM WORK AT ANY HEIGHT ANY FLOOR AND ITS REMOVAL, COMPACTING AND CURING ETC. COMPLETE.	PER CUM	16,000/-	Sixteen thousand	18.00	288,0
3		PROVIDING AND LAYING HARD GRADE RIBBED TOR STEEL (MINIMUM STRENGTH 60,000 PSI) REINFORCEMENT BARS WITH AND INCLUDING THE COST OF STRAIGHTENING, CUTTING, BENDING, BINDING, WASTAGE AND SUCH OVERLAPS AS ARE NOT SHOWN ON THE DRAWING PLACING IN POSITION IN CEMENT CONCRETE 1:2:4 PRECAST OR M.S. CHAIRS, TYING WITH BINDING WIRE, COST OF CHAIRS AND WIRES ETC. IN ALL KIND OF R.C.C WORK IN FOUNDATION, BASEMENT, PLINTH AND GROUND FLOOR.	PER KG	300/-	Three hundred	900.00	270,0
4		REPAIRING OF DAMAGE CEILING ,COLOUMN , CHAJJA, BY PREPARING THE SURFANCE AND APPLYING 3/4" CEMENT SAND LASTER WITH 1:3 RATIO OF SBHRIT SAND FINISHED SMOOTH INCLUDING CHIPPING ,MAKING PROPER THICKNESS AND SURFANCE CURING, SCAFFOLDING, CORNICES, EDGES ALL AS SPECIFIED AND DIRECTED.	PER SQM	1400/-	Fourteen hundred	120.00	168,000
5		PREPARE SURFACE AND APPLYING ½" THICK CEMENT SAND PLASTER AT ANY HEIGHT OF RATIO 1:4, FINISHED SMOOTH INCLUDING CURING, SCAFFOLDING, CORNICES, EDGES ALL AS SPECIFIED AND DIRECTED	PER SQM	800/-	Eight hundred	200.00	160,0
6		----------BOUNDRY WALL FANCING WORK---------- PROVIDING AND LAYING 1:3:6 CEMENT CONCRETE SOLID BLOCK MASONRY MORE THAN 150 MM (6") THICK WALLS AND PILLARS USING GRADED SCREENED BAJRI 20 MM (3/4") AND DOWN GAUGE SET IN 1:4 CEMENT MORTAR IN FOUNDATION, BASEMENT AND PLINTH INCLUDING SCAFFOLDING RAKING OUT JOINTS AND CURING ETC., COMPLETE, (FOUNDATION AND BASEMENT MASONRY UPTO 1.50 M. (5 FT) DEPTH AND PLINTH UPTO 1.25 M. (4 FT) HEIGHT FROM THE GROUND LEVEL).	PER CUM	10,000/-	Ten thousand	14.00	140,00

CHIEF ENGINEER
K.P.T

S.No.	Ref.	Item description	Unit	Rate	Quantity	Amount
		INCHARGE.				
13		PROVIDING AND LAYING SRC (CITY PAVERS), GREY / PIGMENTED OF BEST APPROVED QUALITY OF SIZE 160MM X 200MM X 60MM THICK , HAVING MINIMUM CUBE CRUSHING STRENGTH OF 8000 PSI AT 28 DAYS, LAID IN APPROVED PATTERN AND AT ANY SURFACE INCLUDING LAYING OF MAXIMUM 2" THICK SAND (KHADHA) CUSHION AS UNDER LAYER WITH LEVELING TO REQUIRED PROFILE, COMPACTION, AND FILLING OF PAVER JOINTS WITH SAND FOR INTERLOCKING AND APPLICATION OF VIBRO COMPACTOR OVER THE SURFACE TO ACHIEVE SMOOTH SURFACE, COMPLETE AS PER DIRECTION OF ENGINEER INCHARGE.(CUTTING OF PAVERS BY MEANS OF SPECIAL CUTTING MACHINE).	PER SQM	2200/-	Twenty two hundred	970.00	2,134,000
14		PROVIDING AND FIXING PRECAST ROAD KERB, GREY OF BEST APPROVED QUALITY OF SIZE 6" X 12" X 12", HAVING MINIMUM CUBE CRUSHING STRENGTH OF 3000 PSI AT 28 DAYS, LAID IN APPROVED PATTERN AND AT ANY SURFACE INCLUDING LAYING OF MAXIMUM 3" THICK LEAN BED AS UNDER LAYER WITH LEVELING TO REQUIRED PROFILE, COMPACTION, AND FILLING JOINTS WITH CM 1:4 FOR INTERLOCKING COMPLETE AS PER DIRECTION OF ENGINEER INCHARGE.	PER RUNNING METER	1600/-	Sixteen hundred	160.00	256,000
15		----------STAFF OFFICE WORK------- PROVIDING AND FIXING OF 3/4" THICK PARTITIONS WALLS OF LAMINATED SHEETS WITH GOLDEN TEAK WOOD FRAMING (FUMIGATED) I/C COLOUMS, POSTS, STUDS ETC WITH GOLDEN TEAK WOOD BOARDING COVERING AND WITH SUPERIOR QUALITY CLOTH PASTING WELL WITH FILLETS COMPLETE WITH SCREW /NAILS / GLUES ETC ALL AS SPECIFIED AND AS PER DIRECTION OF ENGINEER INCHARGE.	PER SQM	7900/-	Seventy Nine hundred	32.00	252,800
16		PROVIDING AND FIXING OF COUNTER 2'-6" TO 3' HEIGHT OF APPROVED WIDTH AND LENGHT WITH WOODEN LAMINATED LASSAM SHEETS I/C CABINETS (FLOOR / WALL MOUNTED) COMPLETE WITHDROWERS ,FILE RACK,KEYBOARD ROLLING ETC OF APPROVED SIZE AND NOS. RAILS I/C CHEMICAL POLISHING OF ALL EXPOSED SURFACES AND FIXING OF ALL NECESSARY FITTINGS AND FIXTURES LIKE HANDLES, LOCKS, CATCHERS, CHANNELS, KNOBS, HINGES ETC. AS REQUIRED AND NECESSARY GOLDEN TEAK WOODEN FRAMING FIXED WITH GLUES, NAILS, SCREWS ETC SMRT POLISHING . ALL AS SPECIFIED AND DIRECTED. NOTE: MEASUREMENT WILL BE LENGTH X WIDTH (DEPTH)	PER SQM	4000/-	Four Thousand	10.00	40,000

CHIEF ENGINEER
I.G.P.T

Dated :

S.No.Ref.	Item description	Unit	Rate	Quantity	Amou
17	PROVIDING AND FIXING 3/4" THICK LASANI LAMINATED WITH WOODEN FRAMING CBABINET / ALMIRAS AT ANY HEIGHT AND FLOOR COMPLETE FIXED WITH CHANNELS , SCREWS CATCHERS, ETC COMPLETE AS PER DIRECTION OF ENGINEER INCHARGE.	PER SQ/M	12000/- Twelve thousand -	18.00	216,00
18	----------SEWERAGE WORK---------- EXCAVATION IS ANY KIND OF FOUNDATIONS, DRAINS, TRENCHES, EMBANKMENTS AREA SHAFTS, WELLS, INDEPENDENT HOLES ETC UP TO REQUIRED DEPTH AND 6FT BY ANY MEANS (MANUALLY OR MECHANICALLY) AND BACK FILLING THE EXCAVATED SPOIL WITH SAME MATERIAL CONSOLIDATION, WATERING AND COMPACTION IN LAYERS COMPLETE INCLUDING COST OF TIMBERING AND DEWATERING (IF REQUIRED) AND DISPOSE OFF SURPLUS SPOIL OUTSIDE KPT LIMIT OR AS DIRECTED BY THE ENGINEER IN CHARGE.	PER CU/M	800/- Eight- hundred -	15.00	12000/-
19	PROVIDING AND FIXING OF 8" DIA UPVC PIPE AND SPECIALS AND FIX WITH ALL ACCESSORIES LIKE T, BENDS, SOCKETS, ELBOWS, ¿Y¿, UNIONS ETC COMPLETE AND USE OF BOND ADHESIVE ALL OF BEST APPROVED QUALITY AND MAKE INCLUDING COST OF MAKING GOOD THE DISTURB SURFACES ON LIKE TO LIKE BASIS, FIXED AT ANY HEIGHT ANY SURFACE.	PER R/METER	1400/- Forteen hundred -	150.00	210,000
20	PROVIDING MANHOLE OF SIZE 3X3 FEET OF REQUIRED DEPTH OR AS APPROVED DESGIN AND SPECIFICATION FOR 8 INCH DIA PIPE , MASONARY WALL AND 1/2" THICK CEMENT PLASTER IN 1:3 CEMENT MORTOR TO ALL INSIDE WALLS AND FIXING COVER COMPLETE I/C CURING ETC AS PER DIRECTED BY ENGINEER INCHARGE.	EACH	5000/- Five thousand -	10.00	50,000
21	PROVIDING AND LAYING FLOORS 51 MM. (2") THICK 1:2:4 CEMENT CONCRETE USING GRADED SCREENED BAJRI 19 MM. (3/4") AND DOWN GAUGE LAID IN PANELS INCLUDING FORM WORK CONSOLIDATION, FINISHING, CURING ETC., COMPLETE.	PER SQ/M	1500/- Fifteen hundred -	15.00	22500
22	---------- LAVATORY BLOCKS WORK-------- PROVIDING AND FIXING 4" DIA U-PVC PIPES OF APPROVED QUALITY I/C THE COST OF REMOVING THE EXISTING DAMAGED WORN OUT PIPES COMPLETE I/C PROVIDING / FIXING, FITTINGS SUCH AS BEND,TEE, Y-TEE, UNCTION SOCKET, CLAMPS ETC FIXED AS SPECIFIED BY MANUFECTURERS COST OF R.C.C CUTTING AND RE-INSTETING THE SURFACE COMPLETE AS DIRECTED.	PER R/METER	980/- Nine hundred eighty -	20.00	19,600

CHIEF ENGINEER
K.P.T

AL-SAUD ENGINEERS

REHABILITATION OF KPT BOYS & GIRLS SECONDARY SCHOOL KEMPAM

Dated :

S.No.Ref.	Item description	Unit	Rate		Quantity	Amou
23	PROVIDING AND FIXING U-PVC FLOOR TRAP WITH GRATING JALI OF APPROVED INCLUDING THE CAST OF TAKING OUT THE EXISTING DAMAGED I/C CUTTING C.C FOR HOLES ETC AS REQUIRED AS DIRECTED.	EACH	500/-	Five hundred	8.00	4000
24	PROVIDING & FIXING 1/2" DIA U-PVC VALVE WITH CLAMPS ETC OF APPROVED QUALITY INCLUDING FIXING AS WHERE REQUIRED.	EACH	500/-	Fifte hundred	5.00	2500
25	P/F SINGLE BIB COCK/ STOP COCK/ CONSEALED COCK PROVIDING AND FIXING OF CHROMIUM PLATED / COATED BEST QUALITY OF APPROVED MAKE AND QUALITY (MASTER OR EQUIVALENT) T STOP /STOP COCK (ECONOMY MODEL) FIXED COMPLETE INCLUDING THE COST OF STAINLESS STEEL PIPE NIPPLE ALL AS SPECIFIED AND DIRECTED.	EACH	1220/-	Twelve hundred twenty	30.00	36600
26	DISMENTLING CEMENT / TILED FLOOR, DADO OR SKIRTING IN BASEMENT PLINTH OR GROUND FLOOR I/C BASE MORTAR & STACKING SALVAGE MATERIAL (SERVICEABLE) & DISPOSING OF SURPLUS STUFF AS DIRECTED.	PER SQ/M	350/-	Three hundreel fifty	90.00	31500
27	PROVIDING AND LAYING 6MM THICK WHITE / COLORED CERAMIC TILES GLAZED / MATT NOT EXEC. 300 SQ INCH FINE DRESSED ON THE SURFACE WITHOUT SENDING LAID OVER 1¿ THICK CEMENT MORTAR OF RATIO 1:2, AND IN DADOS & SKIRTING LAID OVER ½¿ THICK BASE OF CEMENT MORTAR 1:3 SETTING TILES IN SLURRY OF GREY CEMENT, JOINTING AND WASHING THE TILES WITH WHITE / COLORED CEMENT SLURRY ALL AS SPECIFIED OR USE OF BOND MORTAR INSTEAD OF CEMENT MORTAR WHICH EVER REQUIRED.	PER SQ/M	3500/-	Thirty five hundreel	90.00	31500
28	PROVIDING AND FIXING DOORS, WINDOWS AND VENTILATORS FRAME OF 18 GAUGE G.I SHEET OF SIZE (2" X 7") OR AS REQUIRED WITH HINGES, PROPER ARRENGEMENT OF FIXING TOWER BOLTS / ALDROPS BY WELDING OR ANY APPROVED MATHED AND HOLDFASTS INCLUDING THE COST OF CUTTING CEMENT CONCRETE WALLS ETC AND TAKING OUT THE EXISTING DAMAGED WOODEN FRAME WITH SHUTTERS AND GRILLS AT ANY HEIGHT AT ANY FLOORS FILLING THE SIDES OF FRAME WITH RICH CEMENT MORTAR AND MASONARY WORK MAKING GOOD THE SAME AS PER EXISTING PLASTERING ETC COMPLETE AND REFIXING WITH SAME SHUTTER AND GRILLS COMPLETE IN ALL RESPECT.	PER R/METER	1600/-	Sixteen hundred	50.00	80,000

CHIEF ENGINEER
K.D.T

AUDI ENGINEERS

REHABILITATION OF KPT BOYS & GIRLS SECONDARY SCHOOL KEAMARI.

Dated :

S.No.Ref.	Item description	Unit	Rate		Quantity	Amou
29	PROVIDING AND FIXING 1 ½" THICK BEST QUALITY PARTAL WOOD DOORS, WINDOWS AND VENTILATORS DOUBLE LEAF, FULLY / PARTIALLY PANELED & PARTIALLY PLAIN GLAZED WITH APPROVED BRASS FITTINGS (MONGERY) AND REQUIRED DEODAR WOOD FRAME OF SIZE (N.EXEC 14 SQ.INCH) INCLUDING WOODEN CLEATS & STOPPERS, BEADING ETC COMPLETE, FRAME HANGING IN POSITION, FIXED ON WALLS WITH HOLD FASTS ETC OR AS DIRECTED.	PER SQ/M	10,000/-	Ten Thousand	18.00	180,(
30	PROVIDING AND FIXING COMMOD GLAZED WARE I/C PAN OF APPROVED SIZE, SHAPE, COLOUR AND MAKE WITH FRONTIN LET AND U-PVC TRAP 4" DIA WITH AND INCLUDING THE COST OF PLASTIC FLUSHING CISTERN WITH FITTING FIXED WITH SCREWS / BOLT STEADARED FLUSH PIPE WITH EXTRA BEND WITH FITTING.OF BEST QUALITY AS DIRECTED SHAPE AND COLOUR COMPLETE IN ALL RESPECT WORKING CONDITION OR AS DIRECTED BY THE ENGINEER.	EACH	12000/-	Twelve Thousand	2.00	24000
31	PROVIDING AND FIXING EASTERN TYPE WHITE / LIGHT COLOR GLAZED WARE WC INCLUDING 13 LITER FLUSHING CISTERN LOW DOWN PLASTIC INCLUDING THE COST OF 4¿ DIA BRASS THIMBLE, MAKING CONNECTION WITH THE WATER AND SEWERAGE MAIN ETC ALL AS SPECIFIED AND DIRECTED. (EXCLUDING THE COST OF T-STOP COCK, STOP COCK, MUSLIM SHOWER, ETC)	EACH	10,000/-	Ten Thousand	2.00	20,00
32	PROVIDING AND FIXING BATHROOM ACCESSORIES SET OF APPROVED QUALITY MASTER MAKE OR EQUIVALENT CONSISTING OF 7 PIECES SUCH AS (MIRROR GLASS SHELF, TOWEL RAIL, TISSUE PAPER BOX HOLDER, TISSUE ROLL HOLE, SOAP CASE ETC. COMPLETE) FIXING IN PROPER POSITION WITH BRASS SCREW AS DIRECTED .	EACH	6000/-	Six Thousand	4.00	24000
33	PROVIDING & FIXING LAVATORY BASIN (25" X 18") OF APPROVED SHAPE, DESIGN COLOUR AND MAKE GALZED EARTHENWARE, COMPLETE WITH PEDESTAL I/C BRACKETS BOLT BUILT IN TO WALLS 1/2" DIA SWAN NECK C.P COCK WITH RUBBER PLUG AND CHAIR C.P WASTE AND WASTE PIPE ETC COMPLETE IN ALL RESPECT	EACH	9000/-	Nine Thousand	4.00	36000
34	PROVIDING AND FIXING 1/2" DIA C-PVC PIPES OF APPROVED QUALITY I/C THE COST OF REMOVING THE EXISTING DAMAGED WORN OUT PIPES COMPLETE I/C PROVIDING / FIXING, FITTINGS SUCH AS BEND,TEE, Y-TEE, UNCTION SOCKET, CLAMPS ETC FIXED AS SPECIFIED BY MANUFECTURERS COST OF R.C.C CUTTING AND RE-INSTETING THE SURFACE COMPLETE AS DIRECTED	PER R/METER	400/-	Four hundred	35.00	14000

CHIEF ENGINEER
K.P.T

AL-SAUDI ENGINEERS

Dated :

S.No.Ref.	Item description	Unit	Rate	Quantity	Amoun
35	PROVIDING AND FIXING OF CHROMIUM PLATED / COATED BEST QUALITY OF APPROVED MAKE AND OUALITY (MASTER OR EQUIVALENT) MUSLIM SHOWER WITH CHAIN / PIPE FIXED COMPLETE WITHOUT THE COST OF DOUBLE BIB COCK ALL AS COMPLETE.	EACH	1000/- One Thousand	30.00	30,00
36	PROVIDING AND FIXING OF CHROMIUM PLATED / COATED BEST QUALITY OF APPROVED MAKE AND QUALITY (MASTER OR EQUIVALENT) BASIN / SINK MIXER (ECONOMY MODEL) FIXED COMPLETE INCLUDING THE COST OF STAINLESS STEEL PIPE NIPPLE ALL AS SPECIFIED AND DIRECTED.	EACH	3500/- Thirty five hundred	10.00	35000
	----------COLOR WORK ----------				
37	PREPARE SURFACE AND APPLYING 2X COATS OF PLASTIC EMULSION PAINT APPROVED MAKE AND SHADE INCLUDING SCRAPING SAND PAPERING DUSTING AND FILLING THE HOLES, CRACKS AND INEQUALITIES IF ANY AT ANY HEIGHT AND IN ANY FLOOR I/C. REMOVING RUBBISH ETC., OUTSIDE K.P.T. LIMIT..(MASONRY).	PER SQ/M	200/- Two hundred	5,800.00	1,160,00
38	PREPARE SURFACE AND APPLYING 2X COATS OF OIL BOUND DISTEMPERING APPROVED MAKE AND SHADE INCLUDING SCRAPING SAND PAPERING DUSTING AND FILLING THE HOLES, CRACKS AND INEQUALITIES IF ANY AT ANY HEIGHT AND IN ANY FLOOR I/C. REMOVING RUBBISH ETC., OUTSIDE K.P.T. LIMIT..	PER SQ/M	230/- Two hundred thirty	2,900.00	667,0
39	PREPARE SURFACE AND APPLYING 2X COATS OF SYNTHETIC ENAMEL PAINT APPROVED MAKE AND SHADE INCLUDING SCRAPING SAND PAPERING DUSTING AND FILLING THE HOLES, CRACKS AND INEQUALITIES IF ANY AT ANY HEIGHT AND IN ANY FLOOR I/C. REMOVING RUBBISH ETC., OUTSIDE K.P.T. LIMIT..(IRON, WOOD AND MAS)	PER SQ/M	550/- Five hundred fifty	800.00	440,0
40	PREPARE SURFACE AND APPLYING 2X COATS OF WEATHER SHIELD PAINT APPROVED MAKE AND SHADE INCLUDING SCRAPING SAND PAPERING DUSTING AND FILLING THE HOLES, CRACKS AND INEQUALITIES IF ANY AT ANY HEIGHT AND IN ANY FLOOR I/C. REMOVING RUBBISH ETC...(MASONRY)	PER SQ/M	200/- Two hundred	5,900.00	1180,0
	---------- FURNITURE REPAIRING---------				
41	REPAIRING OF DAMAGED STUDY DESK WITH REPLACEMENT OF BROKEN WOOD /MS, PIECE WITH ALL ACCESSORIES AND MAINTAIN IN POSITION WITH WELDING RIVITING ETC. AND COLORING AND PAINTING AS DIRECTED BY ENGINEER INCHARGE.	EACH	500/- Five hundred	350.00	17500

CHIEF ENGINEER
K.P.T

REHABILITATION OF KPT BOYS & GIRLS SECONDARY SCHOOL KEAMARI.

Dated :

S.No.Ref.	Item description	Unit	Rate	Quantity	Amou
42	----------GRINDING POLISHING---------- GRINDING POLISHING OF EXISTING MOSAIK / DADO FLOOR AND WALLS COMPLETE BY ANY MEANS COMPLETE ALL AS SPECIFIED AND DIRECTED.	PER SQ/M	120/-	2,350.00	282
43	----------PAINTING WORK IN CLASS ROOMS----- PROVIDING AND PAINTING OF CARTOON FIGURES WITH APPROVED ENAMEL PAINT AT ANY HEIGHT OF ANY FLOOR, ANY SIZE I/C ALL NECESSARY ITEMS AS PER EXISTING OR AS DIRECTION/ SELECTION OF ENGINEER INCHARGE,	PER SQ/M	1000/-	120.00	120,00
44	---------- ANTI TERMITE PROOFING --------- PROVIDING & APPLYING SPRAYING AND PENETRATION THE ANTI TERMITE PROOFING INCLUDING WOOD BORER TREATMENT IN WHOLE AREA OF HOUSE INCLUDING DRILLING HOLES ON ALL FLOORS, WALLS AROUND DOOR FRAMES SHUTERS AS PER RULE AT THE DISTANCE OF 3.FT CENTER TO CENTRE AS PER MANUFACTURES SPECIFICATION (I/C GURANTEE CERTIFICATE) COMPLETE IN ALL RESPECT.	PER SQ/M	400/-	1,600.00	660,00
45	----------JUNGLE CUTTING--------- CLEARING JUNGLE (ORDINARY) BY CUTTING, REMOVING ALL SHRUBS, TREES UP TO 450 MM, GIRTH (18¿) ETC, & TALKING OUT THEIR ENTIRE ROOTS AND FILLING THE HOLES IN LAYERS WITH EARTH COMPETE WITH DRESSING, CONSOLIDATING AND WATERING THE FILLING INCLUDING STACKING THE SERVICEABLE MATERIAL & DISPOSAL OF USELESS MATERIALS AS DIRECTED. OUTSIDE KPT LIMIT.	PER SQ/M	50/-	490.00	2450
46	----------BACK WALL CONCRETE-------- PROVIDING AND LAYING CEMENT CONCRETE USING SCREENED GRADED WITH 2" TO 3" AVERAGE BAJRI 20 MM (3/4") AND DOWN GAUGE HAVING A MINIMUM WORKING CUBE CRUSHING STRENGTH OF 3000 LBS. PER SQ. INCH AFTER 28 DAYS WITH A MIX NOT LEANER THAN 1:2:4 IN COLUMN, BEAMS, LINTELS, ROOF SLAB, CHAJJA, WALLS STAIRCASE, ETC., OF REQUIRED SHAPE AND DESIGN INCLUDING FORM WORK AND ITS REMOVAL, COMPACTING AND CURING ETC. COMPLETE, BUT EXCLUDING THE COST OF REINFORCEMENT IN BASEMENT AND GROUND FLOOR	PER SQ/M	500/-	460.00	230,00
47	----------SCIENCE LAB WORK --------- PROVIDING & FIXING R.C.C PRE-CAST SLAB FOR KITCHEN OF REQUIRED SIZE ETC JOINTING,FIXING ETC COMPLETE AS PER DIRECTION OF ENGINEER INCHARGE	PER SQ/M	3000/-	4.00	1200

CHIEF ENGINEER
K.P.T

AL-SAUDI ENGINEERS

REHABILITATION OF KPT BOYS & GIRLS SECONDARY SCHOOL KEAMARI.

Dated :

S.No.Ref.	Item description	Unit	Rate		Quantity	Amou
48	PROVIDING AND LAYING ¾" THICK WHITE / LIGHT COLOR MARBLE TOP OF APPROVED QUALITY UPTO REQUIRED SIZE FINE /POLISHED DRESSED ON THE SURFACE WITHOUT SANDING LAID OVER 1"THICK CEMENT MORTAR OF RATIO 1:2, AND IN DADOS & SKIRTING LAID OVER ½" THICK BASE OF CEMENT MORTAR 1:3 SETTING IN SLURRY OF GREY CEMENT, JOINTING AND WASHING WITH WHITE / COLORED CEMENT SLURRY INCLUDING GRINDING AND POLISHING ETC ALL AS SPECIFIED OR USE OF BOND MORTAR INSTEAD OF CEMENT MORTAR WHICH EVER REQUIRED.	PER SQ/M	6000/-	Six Thousand	4.00	2400
49	PROVIDING & FIXING VENITY BASIN (36" X 24") UNDER COUNTER OF APPROVED SHAPE, DESIGN COLOUR AND MAKE GALZED EARTHENWARE,I/C WOOD WORK UNDER COUNTER AND BASIN MIXTURE ,DRAIN PIPE COMPLETE COMPLETE WITH PEDESTAL I/C BRACKETS BOLT BUILT IN TO WALLS 1/2" DIA SWAN NECK C.P COCK WITH RUBBER PLUG AND CHAIR C.P WASTE AND WASTE PIPE ETC COMPLETE IN ALL RESPECT.	EACH	36000/-	Thirty Six Thousand	1.00	36000/

TOTAL: 11,130,000.00 556,500	10,650,00
ADD 5% CONTINGENCIES 11,686,500	532,500
NET TOTAL	11,182,500
ADD 13% S.R.B 1519245 13,205,745.00	1453,72
GRAND TOTAL	12,636,22

Twelve millions six hundred six thousand two hundred Twenty five Rupees

CHECKED
RS. 13,205,745.00
12/1/24

AL-SAUDI ENGINEERS
CHIEF ENGINEER
K.D.T

CHIEF ENGINEER
K.P.T